

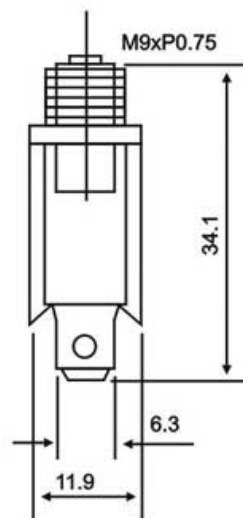


91L 系列过载保护器

91L 系列

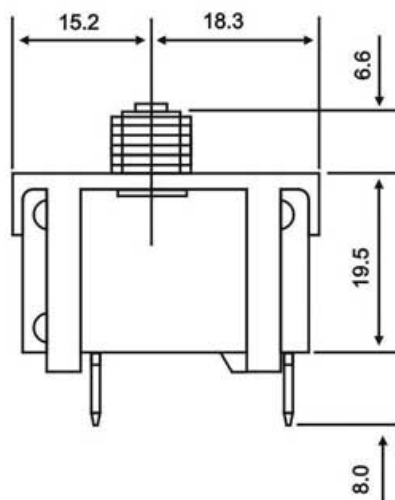

Trip Time Curves

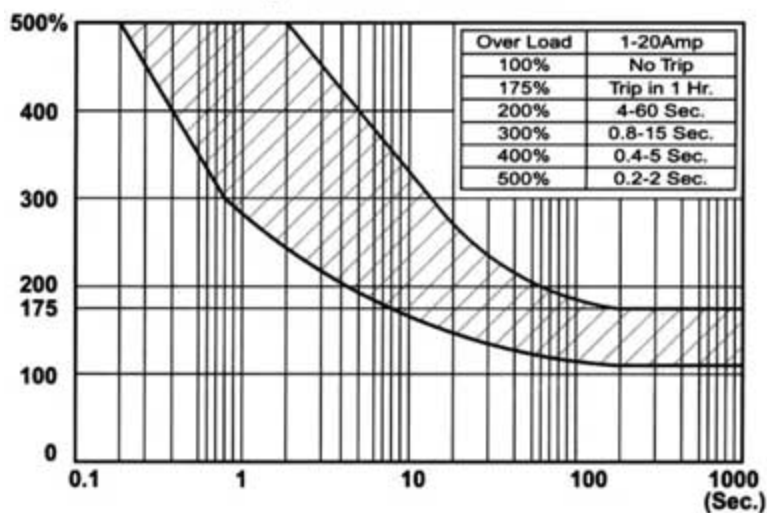

DERATING FACTOR		
TEMP	1A~10A	11A~20A
60°C	--	×0.50
55°C	--	×0.55
50°C	<0.50	×0.65
45°C	<0.55	×0.70
40°C	<0.68	×0.80
35°C	<0.80	×0.85
30°C	<0.86	×0.88
25°C	<1.00	×1.00
20°C	<1.11	×1.10
15°C	<1.20	×1.20
10°C	<1.35	×1.30

MAX.Internal Resistance	
1.5A-2A	0.500Ω
2.1A-2.5A	0.320Ω
2.5A-3A	0.180Ω
3.1A-4A	0.100Ω
5.1A-6A	0.025Ω
7.1A-9A	0.020Ω
10.1A-12A	0.010Ω
13.1A-16A	0.010Ω
17.1A-20A	0.008Ω